

## 2.2 Mac OSX Services - AFP, Web, Windows

This document describes setting up *Apple File Protocol (AFP)* service, a *Web* service, and *Windows* service on a *Mac OS X 10.3 Server*.

These three services are grouped together in this one document for no reason other than that they require minimal configuration, and don't really justify a separate document of their own!


### 1. Apple File Protocol (AFP)

The *Apple Filing Protocol (AFP)* service allows *Macintosh* clients to connect to the server and access folders and files.

#### 1.1. Launch **Server Admin**.




#### 1.2. Click on the **AFP** service in the left pane.



#### 1.3. Click on the **Settings** button in the right pane.



1.4. Click on the **Access** tab, then choose **Standard** from the **Authentication** pop-up menu

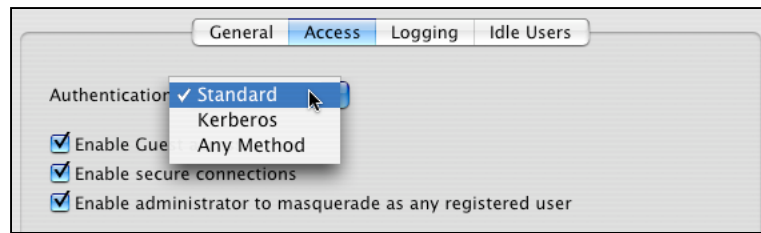

1.5. Click on the **Save** button.

1.6. Click on the **Start Service** button.




1.7. You have now started the **AFP service**.

## 2. Web Service

### 2.1. Launch **Server Admin**.



### 2.2. Click on the **Web** service in the left pane.



### 2.3. Click on the **Start Service** button.



### 2.4. To test that the Web Server is working.....

Go to a client computer, launch a browser, and enter the server's IP address.

Assuming that any proxy server you are using is correctly configured, you should be able to see the server's **default** web page:



This location of this file is: *Library > Webserver > Documents > index.html*


*See Wazza's intranet notes for details about personalising this site for your school's Intranet. ([www.wazmac.com/wazza/intranet](http://www.wazmac.com/wazza/intranet))*

### 3. Windows Services

3.1. Launch **Server Admin**.



3.2. Click on the **Windows** service in the left pane.



3.3. Click on the **Settings** button at the bottom of the window.



3.4. If you know that the *Windows* computers on your network are in a specific *Workgroup*, enter the name of that *Workgroup* in the **Workgroup** field. If not, leave as the default *Workgroup* setting.



Click on the **Save** button.

3.5. Click on the **Start Service** icon at the top of the window.



3.6. Other documents in this series provides more details about *Windows* computers connecting to the workgroup, and setting up and connecting to a *Windows* domain on an *OSX Server*, and